




4 Dimensional Cooperative Arrival Manager (4D-CARMA)

Constantly increasing traffic at airports is the reason for air traffic service providers at big hub airports to look for computer-based systems supporting the controllers to improve the utilisation of the available resources. Controllers managing the inbound traffic perform the following tasks:


- I. Build an arrival sequence.
- 2. Assign an (absolute or relative) arrival time at the runway threshold (and other significant waypoints) to each aircraft in the sequence.
- 3. Predict a trajectory for each aircraft which implements the assigned landing time.
- 4. Transform the trajectory into appropriate guidance instructions which are transmitted to the pilot via voice or data link.

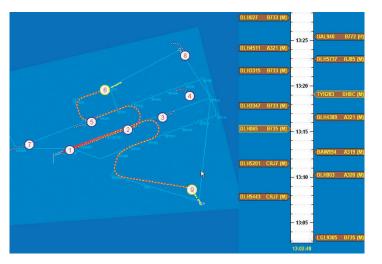

Trajectory based Approach by 4D-CARMA

Arrival Managers (AMAN) which claim to support the controllers have to match with fulfilling these four tasks. The development of AMANs has a long tradition in the Institute of Flight Guidance, German Aerospace Centre (DLR), which already started the design of COMPAS, the forefather of all Arrival Managers in the early 80's. It was brought into operation at Frankfurt Airport. COMPAS already facilitates the first and second task by building an arrival sequence based on flight plans and early radar information. The COMPAS system introduced the time line as controller interface to display the arrival sequence and planned landing times. COMPAS, however, fixed the sequence at a very early stage. Since 2003 its successor, the 4D-Planer, being developed in close cooperation of DLR and DFS, is in operation at Frankfurt Airport. It improves the sequence planning task by constantly considering the actual radar data. The 4D-Planer is therefore able to adapt the schedule of arrivals to any ATC control action, even if this action deviates from the proposed plan. The Institute of Flight Guidance has developed the AMAN 4D-CARMA with the following new features:

- It generates trajectories from aircraft position to the runway threshold, taking into account weather conditions and aircraft performance data (BADA).
- It generates guidance instructions for voice or data link communication.
- Trajectory-based guidance comprises features for conformance monitoring, conflict detection, and resolution.
- The sequence generation is based on optimisation of several, partly contradictory evaluation criteria, e.g. the comparison of two sequences with respect to their noise profiles in the TMA.

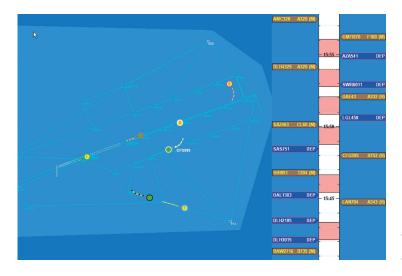

AMAN-DMAN-Coordination via Arrival-Free-Intervals (pink)

The future success of an AMAN will mainly depend on its integration with other controller decision support tools to achieve a smooth and efficient inbound flow whilst maintaining an optimal runway utilisation and taking into account airline preferred trajectories. Therefore 4D-CARMA addresses:

- The horizontal cooperation with a wake vortex prediction system and with DLR's departure manager via an Arrival Departure Coordinator (ADCO).
- The vertical cooperation with DLR's EFMS (extended 4D flight management system) as a first step to trajectory based air-ground cooperation.
- The hierarchical cooperation with DLR's pre-tactical TOP (Total Operations Planner).

Author: Hartmut Helmke Tel.: +49 531 295 2599 E-mail: hartmut.helmke@at-one.aero

AT-One combines the strength of NLR and DLR in ATM Research

DLR

Helmut Toebben +49 531 295 - 2932 helmut.toebben@at-one.aero www.at-one.aero Business Managers Telephone E-mail Internet

NLR

Luc De Nijs +31 20 511 37 37 luc.deNijs@at-one.aero www.at-one.aero